


VCU-100高保真现场拾音器

随着技术的进步及用户需求的提高，国内安防监控行业已经从单纯的视频监控迅速转为音视频同步监控，并对音频采集的灵敏度、清晰度提出了更高的要求。

ELETECH技声高瞻远瞩，很早就推出了VCU-100现场拾音器，以其领先的技术和二十多年在语音领域的经验得到了市场的一致肯定。VCU-100采用四芯线制，有效隔绝电流干扰音，本身无杂音，具有高灵敏度、高保真、高清晰度等特点，获得用户的普遍信赖，尤其在中高端的安防监控等领域具有较高的声誉。

应用上，一般搭配硬盘录像机、视频服务器、音频采集卡等录音设备使用，作为现场环境的监控、录音之用。此外，亦可与本公司VLAN / VUB等系列录音系统搭配使用，实现对纯音频之采集和录音。

实际产品与图片可能略有不同，请在安装前和工程师确认。

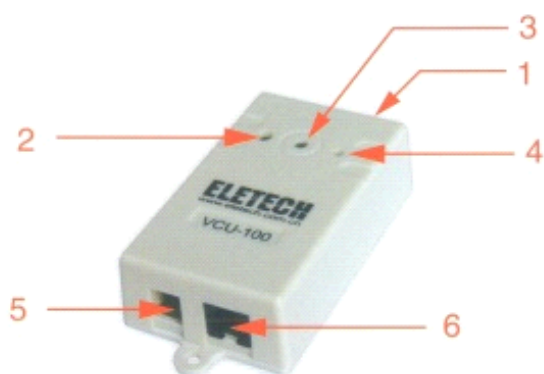

1. 附加MIC输入口
2. 增益放大调整旋钮
3. 内置高灵敏MIC
4. 音频信号强弱LED指示灯
5. 工业接线端子
6. RJ11（音频信号输出及电源输入）

采用四芯制接线（兼容三芯制）

产品规格:

额定电压	DC9V~15V	指向性	全向型
额定电流	1.5mA	增益放大范围	-5~60dB
工作环境温度	-20°C~70°C	输出阻抗	1KΩ
频率回应	220Hz~5800Hz	体积	85mm(长)×50mm(宽)×25mm(高)
信噪比	40dB	外固定孔间距	95mm(两孔中心距离)
灵敏度	-63dB	固定孔直径	4mm

主要应用:

- 房间、机场、高速公路收费站、特种车辆车载集音
- 银行柜台、营业厅、服务窗口集音
- 教室、考场、会议室、大型会场集音
- 司法审判庭、检察院、监狱、看守所、审讯室、调解室集音
- 其它需要拾音或监听之场所

通过ISO 9001:2000

录音设备专业制造商
ELETECH 技声
www.eletech.com.cn
致力于语音事业二十余年


技电上海
技声语音软件(上海)有限公司
地址: 上海徐汇区冠生园路231号01幢
徐汇创意阁211室
邮编: 200235
电话: 86-21-5448 3741~2
传真: 86-21-5448 3743
E-mail: market@eletech.com.cn

区域经销商:

VCU-100 Concealed Microphone

Following technology advances and increasing customer demands, security surveillance systems have been shifting from video only to video with audio. Such systems typically have strict requirements on sound quality and recording sensitivity.

With optimal sound quality and excellent recording sensitivity, the VCU-100 concealed microphone is best suited for coupling with video camera in a surveillance system. Its preamplifier is constructed with manual gain control in order to achieve the best recording result under various environment. VCU-100 can also provide an extra layer of signal conditioning for improved system performance when used with our Archivist/VLAN voice loggers in case microphone recording capability is required.

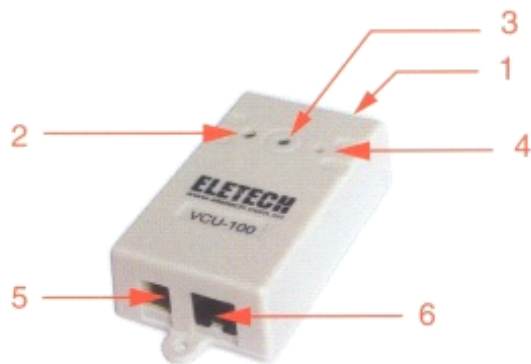

- 1.External MIC Input
- 2.MIC Sensitivity Adjustment
- 3.Built-in High Sensitivity MIC
- 4.Audio Level LED Indicator
- 5.Power Input(Jack or Screw Terminals)
- 6.Audio Output & Power Input(RJ11)

Specifications:

Supply Voltage	DC9V~15V
Current Consumption	<5mA
Operating Temperature	-20°C~70°C
Frequency Response	220Hz~5800Hz
Signal-to-noise Ratio	40dB
Microphone Sensitivity	-63dB/Omnidirectional
Preamplifier Gain	-5~60dB
Output Impedance	1K Ω
Dimensions	85mm(L)*50mm(W)*25mm(H)
Mounting Holes Spacing	95mm(center to center)
Mounting Hole Diameter	4mm

ISO 9001:2000 Registered

ELETECH
<http://www.eletech.com>

Eletech Ent. Co.,LTD
6F,No.108-2,Ming Chuan
Rd.Hsin Tien, Taipei Hsien, Taiwan
TEL:886-2-2218-0068(Rep.)
FAX:886-2-2218-0254
E-mail:eletech@ms2.hinet.net

Eletech Electronics
16025 Kaplan Ave.
City of industry, CA91744, USA
TEL: (626)333-6394
FAX: (626)333-6494
E-mail:sales@eletech.com